

Downlights

Colourful collisions
Particles from the sun form clouds that travel through space at a speed of 300 to 1000 kilometres per second. When those particles collide with oxygen and nitrogen atoms in the earth's atmosphere, they glow and produce a gorgeous palette of colours: the Northern Lights (Aurora Borealis).

The Click one round



The Click one round



The Click combination round & square



Philips Fortimo LED SLM

Technical information



Downlighter recessed, produced in die-cast aluminium with special click system for easy attachment. Fitted with two multi directional rings for complete rotation. Supplied including electronic driver with Philips Fortimo LED SLM system and Jordan reflector. Frame to order separately, look at page 11.

Details


Standard 3000K, beam angle 24°.

Optional: beam angle 38°, double and triple frame, dali dimmable and Osram. Combination of The Click round and The Click square is possible. 1100Lm available in tight beam 12°.

Hole size

L155mm x W155mm

Size



Assortment overview

Article number	Model	Type	Colour	Lumen
12.05.006250	Recessed	The Click 24°	White	LED SLM 1100Lm
12.05.006251	Recessed	The Click 24°	Black	LED SLM 1100Lm
12.05.006252	Recessed	The Click 24°	Grey	LED SLM 1100Lm
12.05.006350	Recessed	The Click 24°	White	LED SLM 2000Lm
12.05.006351	Recessed	The Click 24°	Black	LED SLM 2000Lm
12.05.006352	Recessed	The Click 24°	Grey	LED SLM 2000Lm
12.05.006450	Recessed	The Click 24°	White	LED SLM 3000Lm
12.05.006451	Recessed	The Click 24°	Black	LED SLM 3000Lm
12.05.006452	Recessed	The Click 24°	Grey	LED SLM 3000Lm

The Click one square



The Click one square



The Click one square with raster



Philips Fortimo LED SLM

Technical information



Downlighter recessed, produced in die-cast aluminium with special click system for easy attachment. Fixed model. Supplied including electronic driver with Philips Fortimo LED SLM system and Jordan reflector. Frame to order separately, look at page 11.

Details


Standard 3000K, beam angle 24°.

Optional: beam angle 38°, double or triple frame, dali dimmable, raster, Osram and emergency (look at Emergency Lighting, pages 113-115, The Spy-A, B and C recessed). Combination of The Click one square and The Click one round is possible. 1100Lm available in tight beam 12°.

Hole size

L155mm x W155mm


Size



Assortment overview

Article number	Model	Type	Colour	Lumen
12.05.008950	Recessed	The Click square 24°	White	LED SLM 1100Lm
12.05.008951	Recessed	The Click square 24°	Black	LED SLM 1100Lm
12.05.008952	Recessed	The Click square 24°	Grey	LED SLM 1100Lm
12.05.090050	Recessed	The Click square 24°	White	LED SLM 2000Lm
12.05.090051	Recessed	The Click square 24°	Black	LED SLM 2000Lm
12.05.090052	Recessed	The Click square 24°	Grey	LED SLM 2000Lm
12.05.090150	Recessed	The Click square 24°	White	LED SLM 3000Lm
12.05.090151	Recessed	The Click square 24°	Black	LED SLM 3000Lm
12.05.090152	Recessed	The Click square 24°	Grey	LED SLM 3000Lm

The Click frames

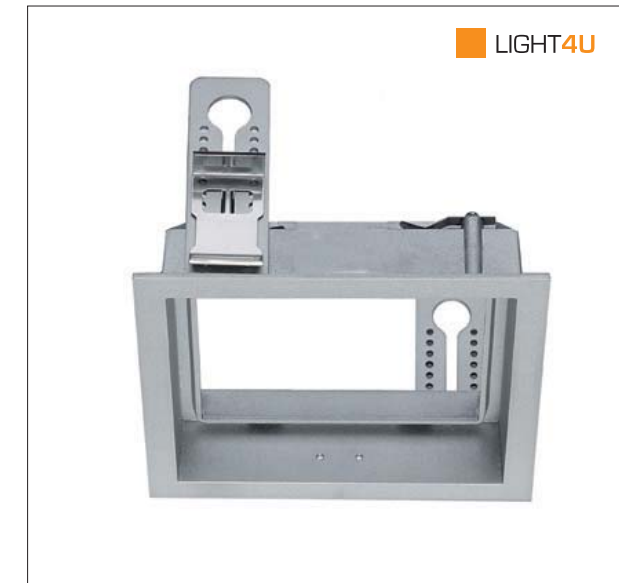

The Click frame single



The Click frame double



The Click frame triple

Technical information



Frames for the Click series.

Assortment overview

Article number	Model	Colour
67.14.062850	The click frame single	White
67.14.062851	The click frame single	Black
67.14.062852	The click frame single	Grey
67.14.062950	The click frame double	White
67.14.062951	The click frame double	Black
67.14.062952	The click frame double	Grey
67.14.063050	The click frame triple	White
67.14.063051	The click frame triple	Black
67.14.063052	The click frame triple	Grey

The Frigo



The Frigo



Philips Fortimo LED SLM

Technical information



Downlighter recessed, produced in die-cast aluminium. Fitted with two multidirectional rings per light source for complete rotation. Supplied including electronic driver with Philips Fortimo LED SLM system and Jordan reflector.

Details


Standard 3000K, beam angle 24°.

Optional: beam angle 38°, Osram and dali dimmable. 1100Lm available in tight beam 12°.

Hole size

Ø144mm

Size

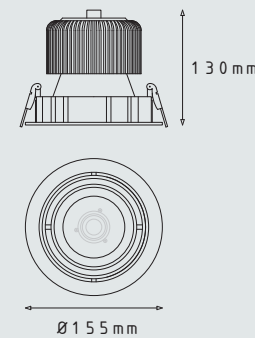

Assortment overview

Article number	Model	Type	Colour	Lumen
12.05.006850	Recessed	The Frigo 24°	White	LED SLM 1100Lm
12.05.006851	Recessed	The Frigo 24°	Black	LED SLM 1100Lm
12.05.006852	Recessed	The Frigo 24°	Grey	LED SLM 1100Lm
12.05.006950	Recessed	The Frigo 24°	White	LED SLM 2000Lm
12.05.006951	Recessed	The Frigo 24°	Black	LED SLM 2000Lm
12.05.006952	Recessed	The Frigo 24°	Grey	LED SLM 2000Lm
12.05.007050	Recessed	The Frigo 24°	White	LED SLM 3000Lm
12.05.007051	Recessed	The Frigo 24°	Black	LED SLM 3000Lm
12.05.007052	Recessed	The Frigo 24°	Grey	LED SLM 3000Lm

The Frisco LED



The Frisco LED



The Frisco LED



Philips Fortimo LED SLM

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 30° adjustable angle. Supplied including electronic driver with Philips Fortimo LED SLM system and Jordan reflector.

Details


Standard 3000K, beam angle 24°.

Optional: beam angle 38°, Osram and dali dimmable. 1100Lm available in tight beam 12°.

Hole size

Ø160mm

Size

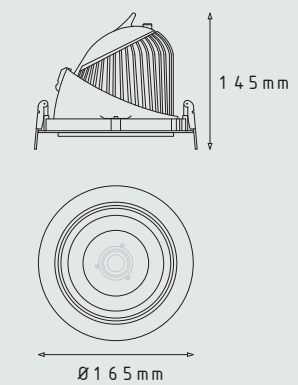

Assortment overview

Article number	Model	Type	Colour	Lumen
12.05.005950	Recessed	The Frisco LED 24°	White	LED SLM 1100Lm
12.05.005951	Recessed	The Frisco LED 24°	Black	LED SLM 1100Lm
12.05.005952	Recessed	The Frisco LED 24°	Grey	LED SLM 1100Lm
12.05.006050	Recessed	The Frisco LED 24°	White	LED SLM 2000Lm
12.05.006051	Recessed	The Frisco LED 24°	Black	LED SLM 2000Lm
12.05.006052	Recessed	The Frisco LED 24°	Grey	LED SLM 2000Lm
12.05.006150	Recessed	The Frisco LED 24°	White	LED SLM 3000Lm
12.05.006151	Recessed	The Frisco LED 24°	Black	LED SLM 3000Lm
12.05.006152	Recessed	The Frisco LED 24°	Grey	LED SLM 3000Lm

The Wink



The Wink



The Wink



Philips Fortimo LED SLM

Technical information



Downlighter recessed, produced in die-cast aluminium. Fitted with two multidirectional rings per light source for complete rotation. Supplied including electronic driver with Philips Fortimo LED SLM system and Jordan reflector.


Details

Standard 3000K, beam angle 24°.

Optional: beam angle 38°, Osram and dali dimmable. 1100Lm available in tight beam 12°.

Hole size

Ø195mm

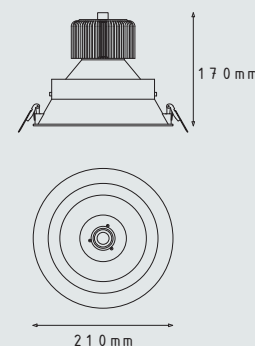Size

Assortment overview

Article number	Model	Type	Colour	Lumen
12.05.008050	Recessed	The Wink 24°	White	LED SLM 1100Lm
12.05.008051	Recessed	The Wink 24°	Black	LED SLM 1100Lm
12.05.008052	Recessed	The Wink 24°	Grey	LED SLM 1100Lm
12.05.008150	Recessed	The Wink 24°	White	LED SLM 2000Lm
12.05.008151	Recessed	The Wink 24°	Black	LED SLM 2000Lm
12.05.008152	Recessed	The Wink 24°	Grey	LED SLM 2000Lm
12.05.008250	Recessed	The Wink 24°	White	LED SLM 3000Lm
12.05.008251	Recessed	The Wink 24°	Black	LED SLM 3000Lm
12.05.008252	Recessed	The Wink 24°	Grey	LED SLM 3000Lm

The Mission open large



The Mission open large



The Mission open large cross louvre



Philips Fortimo LED DLM

Technical information



Downlighter recessed, produced in die-cast aluminium. Supplied including electronic driver with Philips Fortimo LED DLM system.

Details

Standard 3000K, IP20.

Optional: 2700K and 4000K, Osram, dali dimmable, emergency, cross louvre and sealing trim.

13.04.000651 cross louvre


13.02.000455 sealing trim white ø240mm

13.02.000456 sealing trim white ø199mm

Sealing trim also available in black and grey.

Hole size

Ø175mm

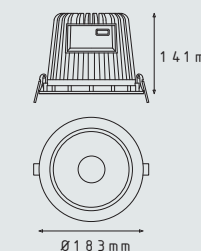Size

Assortment overview

Article number	Model	Type	Colour	Lumen
13.02.000350	Recessed	The Mission open large 53°	White	LED DLM 1100Lm
13.02.000351	Recessed	The Mission open large 53°	Black	LED DLM 1100Lm
13.02.000352	Recessed	The Mission open large 53°	Grey	LED DLM 1100Lm
13.02.000250	Recessed	The Mission open large 53°	White	LED DLM 2000Lm
13.02.000251	Recessed	The Mission open large 53°	Black	LED DLM 2000Lm
13.02.000252	Recessed	The Mission open large 53°	Grey	LED DLM 2000Lm
13.02.000260	Recessed	The Mission open large 53°	White	LED DLM 3000Lm
13.02.000261	Recessed	The Mission open large 53°	Black	LED DLM 3000Lm
13.02.000262	Recessed	The Mission open large 53°	Grey	LED DLM 3000Lm

The Mission closed large



The Mission closed large



Philips Fortimo LED DLM

Technical information



Downlighter recessed, produced in die-cast aluminium with polycarbonate diffuser. Supplied including electronic driver with Philips Fortimo LED DLM system.

Details

Standard 3000K, IP44.

Optional: 2700K and 4000K, Osram, dali dimmable, emergency and sealing trim.

13.02.000455 sealing trim white ø240mm


13.02.000456 sealing trim white ø199mm

Sealing trim also available in black and grey.

Hole size

Ø175mm

Size

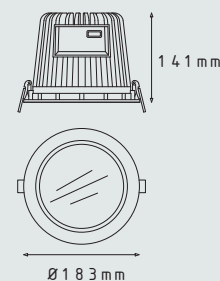

Assortment overview

Article number	Model	Type	Colour	Lumen
13.02.000150	Recessed	The Mission closed large 53°	White	LED DLM 1100Lm
13.02.000151	Recessed	The Mission closed large 53°	Black	LED DLM 1100Lm
13.02.000152	Recessed	The Mission closed large 53°	Grey	LED DLM 1100Lm
13.02.000050	Recessed	The Mission closed large 53°	White	LED DLM 2000Lm
13.02.000051	Recessed	The Mission closed large 53°	Black	LED DLM 2000Lm
13.02.000052	Recessed	The Mission closed large 53°	Grey	LED DLM 2000Lm
13.02.000160	Recessed	The Mission closed large 53°	White	LED DLM 3000Lm
13.02.000161	Recessed	The Mission closed large 53°	Black	LED DLM 3000Lm
13.02.000162	Recessed	The Mission closed large 53°	Grey	LED DLM 3000Lm

The Mission open & closed integrated



The Mission open & closed integrated



Philips Fortimo LED DLM-I

Technical information



Downlighter recessed, produced in die-cast aluminium. Supplied including electronic driver with Philips Fortimo LED DLM-I system.

Details

Standard 3000K. The Mission closed IP44 with polycarbonate diffuser. The Mission open IP20.

Optional: 2700K and 4000K, Osram and sealing trim. Optional The Mission open: cross louvre.

13.04.000651 cross louvre

13.02.000455 sealing trim white ø240mm


13.02.000456 sealing trim white ø199mm

Sealing trim also available in black and grey.

Hole size

Ø175mm

Size

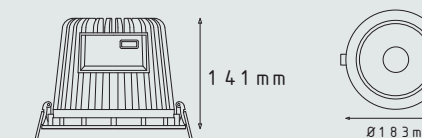

Assortment overview

Article number	Model	Type	Colour	Lumen
13.03.000180	Recessed	The Mission open integrated 53°	White	LED DLM-I 1100Lm
13.03.000181	Recessed	The Mission open integrated 53°	Black	LED DLM-I 1100Lm
13.03.000182	Recessed	The Mission open integrated 53°	Grey	LED DLM-I 1100Lm
13.03.000190	Recessed	The Mission open integrated 53°	White	LED DLM-I 2000Lm
13.03.000191	Recessed	The Mission open integrated 53°	Black	LED DLM-I 2000Lm
13.03.000192	Recessed	The Mission open integrated 53°	Grey	LED DLM-I 2000Lm
13.03.000160	Recessed	The Mission closed integrated 53°	White	LED DLM-I 1100Lm
13.03.000161	Recessed	The Mission closed integrated 53°	Black	LED DLM-I 1100Lm
13.03.000162	Recessed	The Mission closed integrated 53°	Grey	LED DLM-I 1100Lm
13.03.000170	Recessed	The Mission closed integrated 53°	White	LED DLM-I 2000Lm
13.03.000171	Recessed	The Mission closed integrated 53°	Black	LED DLM-I 2000Lm
13.03.000172	Recessed	The Mission closed integrated 53°	Grey	LED DLM-I 2000Lm

The Mission open small



The Mission open small



The Mission open small



Philips Fortimo LED Disk

Technical information



Downlighter recessed, produced in die-cast aluminium with a deep recessed trim. Supplied including electronic driver with Philips LED Disk module and an integrated driver.

Details


Standard 3000K, dimmable.

Optional: 2700K, 4000K and 5000K.

Hole size

Ø118mm

Size

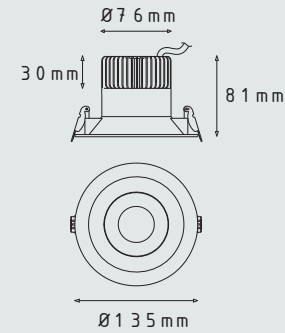

Assortment overview

Article number	Model	Type	Colour	Lumen
13.03.000150	Recessed	The Mission open small 85°	White	LED Disk 800Lm
13.03.000151	Recessed	The Mission open small 85°	Black	LED Disk 800Lm
13.03.000152	Recessed	The Mission open small 85°	Grey	LED Disk 800Lm

The Mission open large deep



The Mission open large deep



Philips Fortimo LED DLM

Technical information



Downlighter recessed, produced in die-cast aluminium with a deep recessed trim. Supplied including electronic driver with Philips Fortimo LED DLM system.

Details

Standard 3000K, IP20.


Optional: 2700K and 4000K, Osram, dali dimmable, emergency, cross louvre and Philips Fortimo LED DLM-I system.

13.04.000651 cross louvre

Hole size

Ø200mm

Size

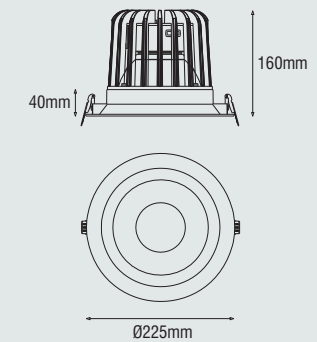

Assortment overview

Article number	Model	Type	Colour	Lumen
13.04.000500	Recessed	The Mission open large deep 53°	White	LED DLM 1100Lm
13.04.000501	Recessed	The Mission open large deep 53°	Black	LED DLM 1100Lm
13.04.000502	Recessed	The Mission open large deep 53°	Grey	LED DLM 1100Lm
13.04.000510	Recessed	The Mission open large deep 53°	White	LED DLM 2000Lm
13.04.000511	Recessed	The Mission open large deep 53°	Black	LED DLM 2000Lm
13.04.000512	Recessed	The Mission open large deep 53°	Grey	LED DLM 2000Lm
13.04.000520	Recessed	The Mission open large deep 53°	White	LED DLM 3000Lm
13.04.000521	Recessed	The Mission open large deep 53°	Black	LED DLM 3000Lm
13.04.000522	Recessed	The Mission open large deep 53°	Grey	LED DLM 3000Lm

The Mission closed large deep



The Mission closed large deep



Philips Fortimo LED DLM

Technical information



Downlighter recessed, produced in die-cast aluminium with polycarbonate diffuser and a deep recessed trim. Supplied including electronic driver with Philips Fortimo LED DLM system.

Details


Standard 3000K, IP44.

Optional: 2700K and 4000K, Osram, dali dimmable, emergency and Philips Fortimo LED DLM-I system.

Hole size

Ø200mm

Size

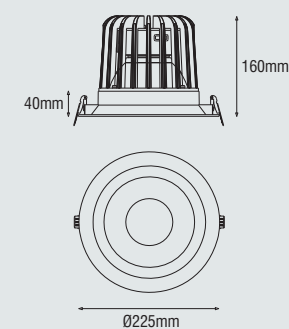

Assortment overview

Article number	Model	Type	Colour	Lumen
13.04.000530	Recessed	The Mission closed large deep 53°	White	LED DLM 1100Lm
13.04.000531	Recessed	The Mission closed large deep 53°	Black	LED DLM 1100Lm
13.04.000532	Recessed	The Mission closed large deep 53°	Grey	LED DLM 1100Lm
13.04.000540	Recessed	The Mission closed large deep 53°	White	LED DLM 2000Lm
13.04.000541	Recessed	The Mission closed large deep 53°	Black	LED DLM 2000Lm
13.04.000542	Recessed	The Mission closed large deep 53°	Grey	LED DLM 2000Lm
13.04.000550	Recessed	The Mission closed large deep 53°	White	LED DLM 3000Lm
13.04.000551	Recessed	The Mission closed large deep 53°	Black	LED DLM 3000Lm
13.04.000552	Recessed	The Mission closed large deep 53°	Grey	LED DLM 3000Lm

The Wave



The Wave

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket is 30° vertically rotational. Supplied including electronic driver.

Details


Standard 3000K, beam angle 24°.

Optional: 2800K and 6500K.

Hole size

Ø75mm

Size

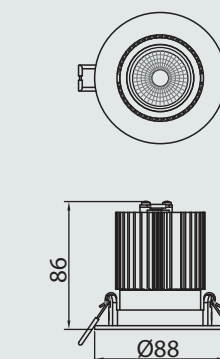

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000000	Recessed	The Wave 24°	White	EDISON LED 900Lm
11.00.000001	Recessed	The Wave 24°	Black	EDISON LED 900Lm
11.00.000002	Recessed	The Wave 24°	Grey	EDISON LED 900Lm

The Coral small & large



The Coral small



The Coral large

Technical information



Downlighter recessed, produced in die-cast aluminium with polycarbonate cover. Fixed model. Supplied including electronic driver and 1,5m cable with EU-plug.

Details

Standard 3000K, beam angle 140°.


Optional: 2800K and 6500K.

Hole size

The Coral small Ø150mm

The Coral large Ø210mm

Size

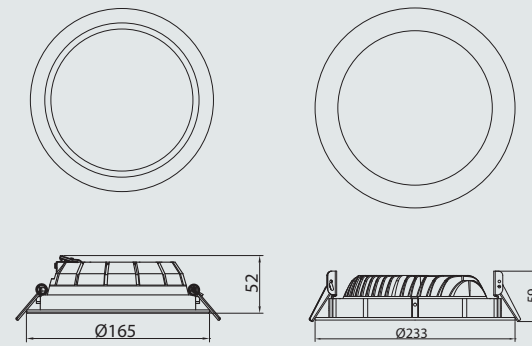

The Coral small

The Coral large

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000010	Recessed	The Coral small 140°	White	LED 1320Lm
11.00.000011	Recessed	The Coral small 140°	Black	LED 1320Lm
11.00.000012	Recessed	The Coral small 140°	Grey	LED 1320Lm
11.00.000020	Recessed	The Coral large 140°	White	LED 2640Lm
11.00.000021	Recessed	The Coral large 140°	Black	LED 2640Lm
11.00.000022	Recessed	The Coral large 140°	Grey	LED 2640Lm

The Sensor



The Sensor recessed



The Sensor surface mounted

Technical information



Downlighter recessed, produced in die-cast aluminium with polycarbonate cover. Fixed model. Supplied including electronic driver and 1,5m cable with EU-plug.

Details


Standard 3000K.

Optional: 2800K and 6500K, emergency.

Hole size

The Sensor recessed Ø235mm

Size

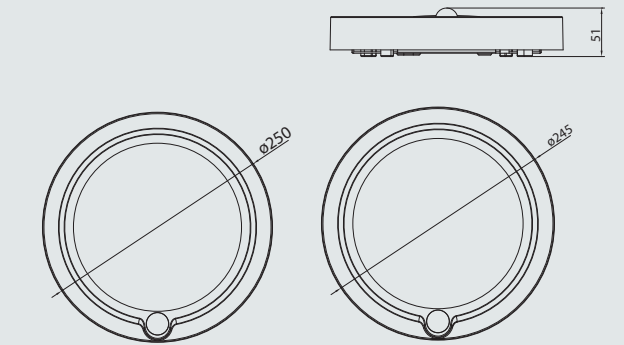

The Sensor recessed

The Sensor surface mounted

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000030	Recessed	The Sensor	White	LED 1600Lm
11.00.000031	Recessed	The Sensor	Black	LED 1600Lm
11.00.000032	Recessed	The Sensor	Grey	LED 1600Lm
11.00.001080	Surface mounted	The Sensor	White	LED 1600Lm
11.00.001081	Surface mounted	The Sensor	Black	LED 1600Lm
11.00.001082	Surface mounted	The Sensor	Grey	LED 1600Lm

The Rock



The Rock

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket is 30° vertically rotational. Supplied including electronic driver and 1,5m cable with EU-plug.

Details


Standard 3000K, beam angle 24°.

Optional: 2800K and 6500K.

Hole size

L100mm x W100mm

Size

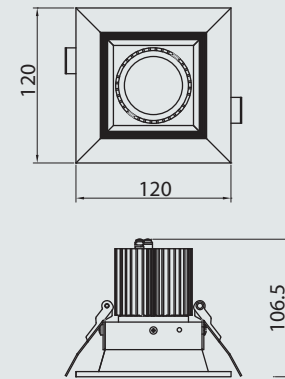

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000040	Recessed	The Rock 24°	White	EDISON LED 900Lm
11.00.000041	Recessed	The Rock 24°	Black	EDISON LED 900Lm
11.00.000042	Recessed	The Rock 24°	Grey	EDISON LED 900Lm

The Stone



The Stone

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 35° adjustable angle. Supplied including electronic driver and 1,5m cable with EU-plug.

Details


Standard 3000K, beam angle 35°.

Optional: 2700K, 4000K and 5000K, beam angle 25° and 55°.

Hole size

Ø122mm

Size

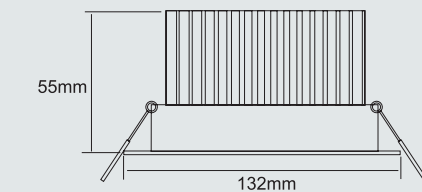

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000130	Recessed	The Stone 35°	White	LED 840Lm
11.00.000132	Recessed	The Stone 35°	Grey	LED 840Lm

The Ridge



The Ridge

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 35° adjustable angle. Supplied including electronic driver and 1,5m cable with EU-plug.

Details


Standard 3000K, beam angle 35°.

Optional: 2700K, 4000K and 5000K, beam angle 25° and 55°.

Hole size

Ø122mm

Size

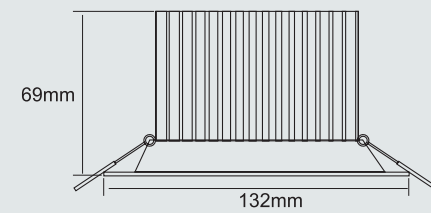

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000140	Recessed	The Ridge 35°	White	LED 840Lm
11.00.000142	Recessed	The Ridge 35°	Grey	LED 840Lm

The Njord



The Njord

Technical information



Downlighter recessed, produced in die-cast aluminium. Fixed model. Supplied including electronic driver with Philips Fortimo LED SLM system.

Details


Standard colour white, 3000K, beam angle 55°.

Optional: black and grey, 4000K, Osram and dali dimmable.

Hole size

Ø135mm

Size

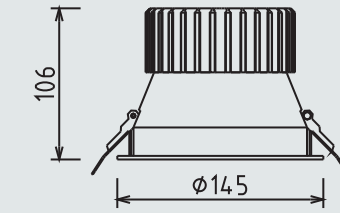

Philips Fortimo LED SLM

Assortment overview

Article number	Model	Type	Colour	Lumen
13.05.000200	Recessed	The Njord 55°	White	LED SLM 1100Lm
13.05.000210	Recessed	The Njord 55°	White	LED SLM 2000Lm
13.05.000220	Recessed	The Njord 55°	White	LED SLM 3000Lm

The Baldr small & large



The Baldr



Philips Fortimo LED SLM

Technical information



Downlighter recessed, produced in die-cast aluminium. Fixed model. Supplied including electronic driver with Philips Fortimo LED SLM system.

Details

Standard colour white, 3000K. The Baldr small: beam angle 45°. The Baldr large: beam angle 55°.


Optional: black and grey, 4000K, Osram and dali dimmable.

Hole size

The Baldr small Ø115mm

The Baldr large Ø140mm

Size

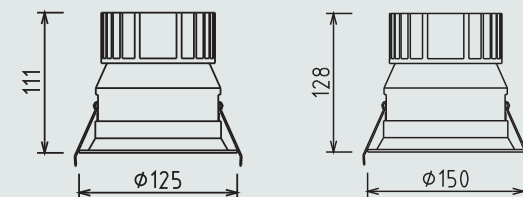

The Baldr small

The Baldr large

Assortment overview

Article number	Model	Type	Colour	Lumen
13.05.000100	Recessed	The Baldr small 45°	White	LED SLM 1100Lm
13.05.000110	Recessed	The Baldr small 45°	White	LED SLM 2000Lm
13.05.000120	Recessed	The Baldr large 55°	White	LED SLM 1100Lm
13.05.000130	Recessed	The Baldr large 55°	White	LED SLM 2000Lm
13.05.000140	Recessed	The Baldr large 55°	White	LED SLM 3000Lm

The Fenrir small & large



The Fenrir



Philips Fortimo LED SLM

Technical information



Downlighter recessed, produced in die-cast aluminium. Fixed model. Supplied including electronic driver with Philips Fortimo LED SLM system.

Details

Standard colour white, 3000K. The Fenrir small: beam angle 45°. The Fenrir large: beam angle 55°.


Optional: black and grey, 4000K, Osram and dali dimmable.

Hole size

The Fenrir small L116mm x W116mm

The Fenrir large L140mm x W140mm

Size

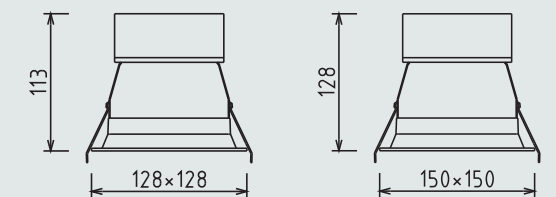

The Fenrir small

The Fenrir large

Assortment overview

Article number	Model	Type	Colour	Lumen
13.05.000150	Recessed	The Fenrir small 45°	White	LED SLM 1100Lm
13.05.000160	Recessed	The Fenrir small 45°	White	LED SLM 2000Lm
13.05.000170	Recessed	The Fenrir large 55°	White	LED SLM 1100Lm
13.05.000180	Recessed	The Fenrir large 55°	White	LED SLM 2000Lm
13.05.000190	Recessed	The Fenrir large 55°	White	LED SLM 3000Lm

The Albion small & large



The Albion small



The Albion large

Technical information



Downlighter recessed, produced in die-cast aluminium, fixed model. Supplied including electronic driver and 1,5m cable with EU-plug.

Details


Standard 3000K, beam angle 25° and 40°.

Hole size

The Albion small Ø75mm

The Albion large Ø100mm

Size

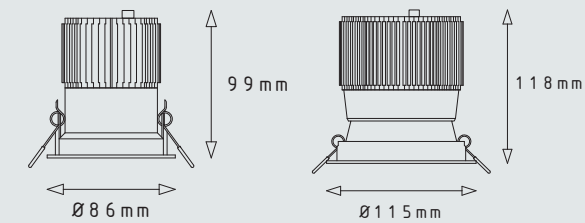

The Albion small

The Albion large

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000560	Recessed	The Albion small 25°	White	LED 500Lm
11.00.000570	Recessed	The Albion small 40°	White	LED 500Lm
11.00.000580	Recessed	The Albion large 25°	White	LED 750Lm
11.00.000590	Recessed	The Albion large 40°	White	LED 750Lm

The Tint



The Tint

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 30° adjustable angle. Supplied including electronic driver and 1,5m cable with EU-plug.


Details

Standard 3000K, beam angle 15° and 25°.

Hole size

Ø70mm

Size

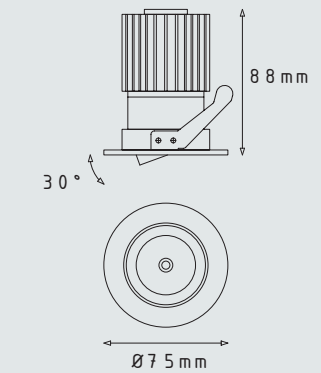

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000600	Recessed	The Tint 15°	White	LED 720Lm
11.00.000610	Recessed	The Tint 25°	White	LED 720Lm
11.00.000601	Recessed	The Tint 15°	Grey	LED 720Lm
11.00.000611	Recessed	The Tint 25°	Grey	LED 720Lm

The Canis



The Canis

Technical information



Downlighter recessed, produced in die-cast aluminium, fixed model. Supplied including electronic driver and 1,5m cable with EU-plug.


Details

Standard 3000K, beam angle 30° and 40°.

Hole size

Ø75mm

Size

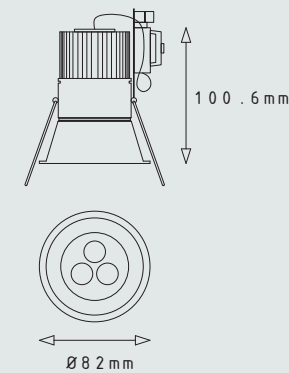

Assortment overview

Article number	Model	Type	Colour	Lumen
15.01.000010	Recessed	The Canis 30°	White	LED 550Lm
15.01.000020	Recessed	The Canis 40°	White	LED 550Lm

The Auriga



The Auriga

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 30° adjustable angle. Supplied including electronic driver and 1,5m cable with EU-plug.


Details

Standard 3000K, beam angle 30° and 60°.

Hole size

Ø70mm

Size

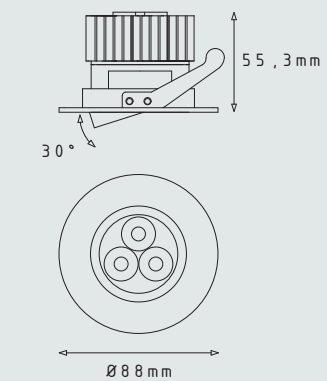

Assortment overview

Article number	Model	Type	Colour	Lumen
15.01.000072	Recessed	The Auriga 60°	Grey	LED 550Lm
15.01.000082	Recessed	The Auriga 30°	Grey	LED 550Lm

The Bari



The Bari

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 30° adjustable angle. Supplied including electronic driver and 1,5m cable with EU-plug.


Details

Standard 3000K, beam angle 25° and 40°.

Hole size

L85mm x W75mm

Size

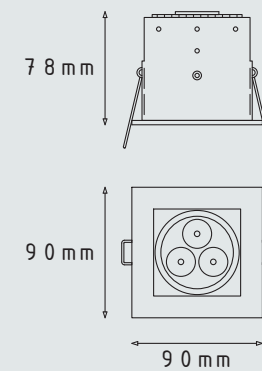

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000620	Recessed	The Bari 25°	White	LED 550Lm
11.00.000630	Recessed	The Bari 40°	White	LED 550Lm
11.00.000621	Recessed	The Bari 25°	Grey	LED 550Lm
11.00.000631	Recessed	The Bari 40°	Grey	LED 550Lm

The Scorpion



The Scorpion

Technical information



Downlighter recessed, produced in die-cast aluminium, white varnished with an opal cover. Fixed model. Supplied including electronic driver and 1,5m cable with EU-plug.


Details

Standard 3000K, IP44.

Hole size

Ø75mm

Size

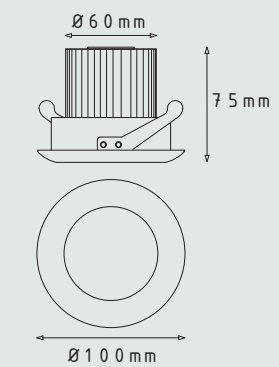

Assortment overview

Article number	Model	Type	Colour	Lumen
15.01.000850	Recessed	The Scorpion	White	LED 550Lm

The Genua



The Genua

Technical information



Downlighter recessed, produced in brushed aluminium. Fixed model. Supplied including electronic driver and 1,5m cable with EU-plug.


Details

Standard 3000K.

Hole size

Ø55mm

Size



Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000641	Recessed	The Genua	Alu	LED 180Lm

The Sumo



The Sumo

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 45° adjustable angle. Supplied including electronic driver with LED ARRAY.

Details


Standard 3000K, beam angle 20°.

Optional: beam angle 38°.

Hole size

Ø93mm

Size

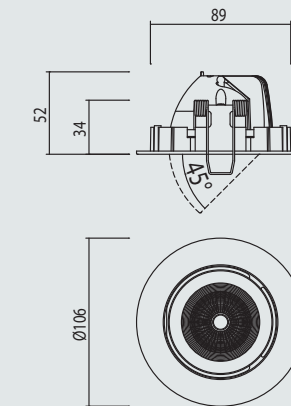

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000830	Recessed	The Sumo 20°	White	LED 445Lm
11.00.000831	Recessed	The Sumo 20°	Black	LED 445Lm
11.00.000832	Recessed	The Sumo 20°	Grey	LED 445Lm

The Larino one round



The Larino one round



Philips Fortimo LED SLM

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 25° adjustable angle. Supplied including electronic driver with Philips Fortimo LED SLM system.

Details


Standard 3000K, beam angle 24°.

Optional: 4000K, beam angle 40°, Osram and dimmable.

Hole size

Ø120mm

Size

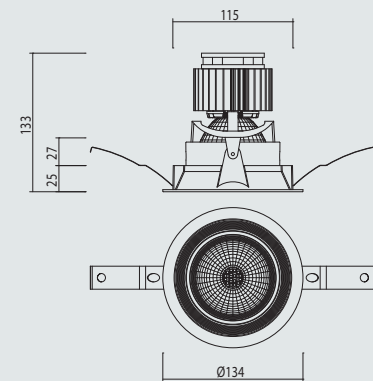

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000900	Recessed	The Larino one round 24°	White	LED SLM 1100Lm
11.00.000901	Recessed	The Larino one round 24°	Black	LED SLM 1100Lm
11.00.000902	Recessed	The Larino one round 24°	Grey	LED SLM 1100Lm
11.00.000910	Recessed	The Larino one round 24°	White	LED SLM 2000Lm
11.00.000911	Recessed	The Larino one round 24°	Black	LED SLM 2000Lm
11.00.000912	Recessed	The Larino one round 24°	Grey	LED SLM 2000Lm
11.00.000920	Recessed	The Larino one round 24°	White	LED SLM 3000Lm
11.00.000921	Recessed	The Larino one round 24°	Black	LED SLM 3000Lm
11.00.000922	Recessed	The Larino one round 24°	Grey	LED SLM 3000Lm

The Larino one square



The Larino one square



Philips Fortimo LED SLM

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 25° adjustable angle. Supplied including electronic driver with Philips Fortimo LED SLM system.

Details


Standard 3000K, beam angle 24°.

Optional: 4000K, beam angle 40°, Osram and dimmable.

Hole size

L125mm x W125mm

Size

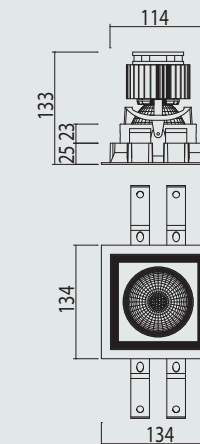

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000930	Recessed	The Larino one square 24°	White	LED SLM 1100Lm
11.00.000931	Recessed	The Larino one square 24°	Black	LED SLM 1100Lm
11.00.000932	Recessed	The Larino one square 24°	Grey	LED SLM 1100Lm
11.00.000940	Recessed	The Larino one square 24°	White	LED SLM 2000Lm
11.00.000941	Recessed	The Larino one square 24°	Black	LED SLM 2000Lm
11.00.000942	Recessed	The Larino one square 24°	Grey	LED SLM 2000Lm
11.00.000950	Recessed	The Larino one square 24°	White	LED SLM 3000Lm
11.00.000951	Recessed	The Larino one square 24°	Black	LED SLM 3000Lm
11.00.000952	Recessed	The Larino one square 24°	Grey	LED SLM 3000Lm

The Larino two square



The Larino two square



Philips Fortimo LED SLM

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 25° adjustable angle. Supplied including electronic driver with Philips Fortimo LED SLM system.

Details


Standard 3000K, beam angle 24°.

Optional: 4000K, beam angle 40°, Osram and dimmable.

Hole size

L230mm x W125mm

Size

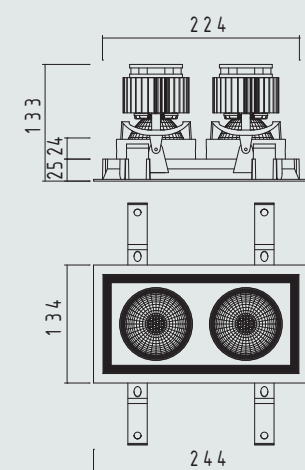

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000960	Recessed	The Larino two square 24°	White	LED SLM 1100Lm
11.00.000961	Recessed	The Larino two square 24°	Black	LED SLM 1100Lm
11.00.000962	Recessed	The Larino two square 24°	Grey	LED SLM 1100Lm
11.00.000970	Recessed	The Larino two square 24°	White	LED SLM 2000Lm
11.00.000971	Recessed	The Larino two square 24°	Black	LED SLM 2000Lm
11.00.000972	Recessed	The Larino two square 24°	Grey	LED SLM 2000Lm
11.00.000980	Recessed	The Larino two square 24°	White	LED SLM 3000Lm
11.00.000981	Recessed	The Larino two square 24°	Black	LED SLM 3000Lm
11.00.000982	Recessed	The Larino two square 24°	Grey	LED SLM 3000Lm

The Larino three square



The Larino three square



Philips Fortimo LED SLM

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 25° adjustable angle. Supplied including electronic driver with Philips Fortimo LED SLM system.

Details


Standard 3000K, beam angle 24°.

Optional: 4000K, beam angle 40°, Osram and dimmable.

Hole size

L330mm x W125mm

Size

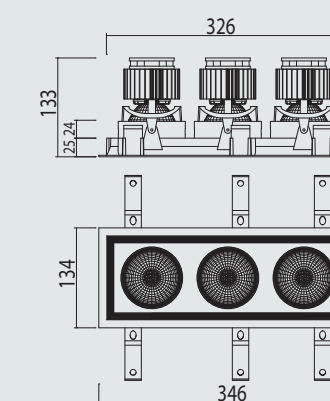

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000990	Recessed	The Larino three square 24°	White	LED SLM 1100Lm
11.00.000991	Recessed	The Larino three square 24°	Black	LED SLM 1100Lm
11.00.000992	Recessed	The Larino three square 24°	Grey	LED SLM 1100Lm
11.00.001000	Recessed	The Larino three square 24°	White	LED SLM 2000Lm
11.00.001001	Recessed	The Larino three square 24°	Black	LED SLM 2000Lm
11.00.001002	Recessed	The Larino three square 24°	Grey	LED SLM 2000Lm
11.00.001010	Recessed	The Larino three square 24°	White	LED SLM 3000Lm
11.00.001011	Recessed	The Larino three square 24°	Black	LED SLM 3000Lm
11.00.001012	Recessed	The Larino three square 24°	Grey	LED SLM 3000Lm

The Dorado one round & square



The Dorado one round



The Dorado one square

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 25° adjustable angle. Supplied including Philips LED ARRAY system.

Details

Standard 3000K, beam angle 40°.


Optional: 4100K and 5600K, beam angle 25°.

Hole size

The Dorado one round Ø119mm

The Dorado one square L122mm x W122mm

Size

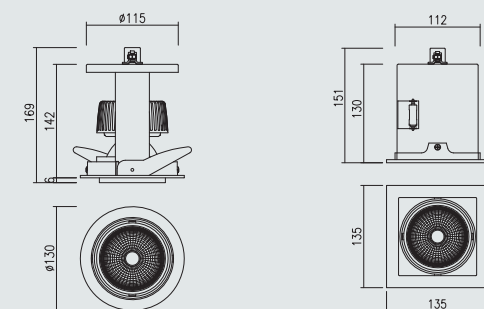

The Dorado one round

The Dorado one square

Assortment overview

Article number	Model	Type	Colour	Lumen
12.02.001210	Recessed	The Dorado one round 40°	White	LED ARRAY 1051Lm
12.02.001211	Recessed	The Dorado one round 40°	Black	LED ARRAY 1051Lm
12.02.001212	Recessed	The Dorado one round 40°	Grey	LED ARRAY 1051Lm
12.02.001190	Recessed	The Dorado one square 40°	White	LED ARRAY 1051Lm
12.02.001191	Recessed	The Dorado one square 40°	Black	LED ARRAY 1051Lm
12.02.001192	Recessed	The Dorado one square 40°	Grey	LED ARRAY 1051Lm

The Dorado two & three square



The Dorado two square



The Dorado three square

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 25° adjustable angle. Supplied including Philips LED ARRAY system.

Details

Standard 3000K, beam angle 40°.


Optional: 4100K and 5600K, beam angle 25°.

Hole size

The Dorado two square L225mm x W122mm

The Dorado three square L330mm x W122mm

Size

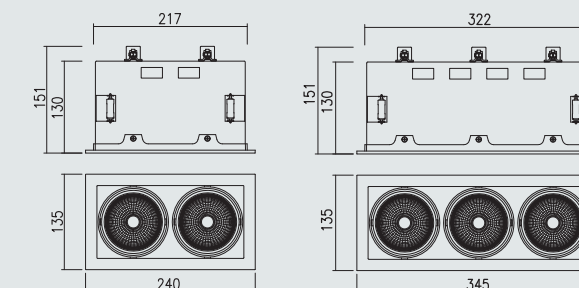

The Dorado two square

The Dorado three square

Assortment overview

Article number	Model	Type	Colour	Lumen
12.02.002000	Recessed	The Dorado two square 40°	White	LED ARRAY 1051Lm
12.02.002001	Recessed	The Dorado two square 40°	Black	LED ARRAY 1051Lm
12.02.002002	Recessed	The Dorado two square 40°	Grey	LED ARRAY 1051Lm
12.02.002010	Recessed	The Dorado three square 40°	White	LED ARRAY 1051Lm
12.02.002011	Recessed	The Dorado three square 40°	Black	LED ARRAY 1051Lm
12.02.002012	Recessed	The Dorado three square 40°	Grey	LED ARRAY 1051Lm

The Delphinus one round & square



The Delphinus one round



The Delphinus one square



Philips Fortimo LED Disk

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 25° adjustable angle. Supplied including electronic driver with Philips Fortimo LED Disk module and an integrated driver.

Details

Standard 2700K, beam angle 54°, dimmable.


Optional: 4000K and 5000K, beam angle 25°.

Hole size

The Delphinus one round Ø119mm

The Delphinus one square L122mm x W122mm

Size

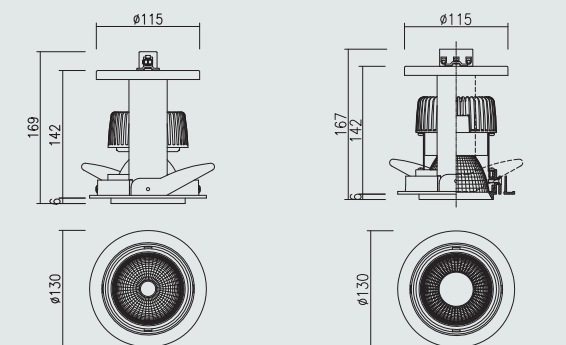

The Delphinus one round

The Delphinus one square

Assortment overview

Article number	Model	Type	Colour	Lumen
12.02.001900	Recessed	The Delphinus one round 54°	White	LED Disk 800Lm
12.02.001901	Recessed	The Delphinus one round 54°	Black	LED Disk 800Lm
12.02.001902	Recessed	The Delphinus one round 54°	Grey	LED Disk 800Lm
12.02.002020	Recessed	The Delphinus one square 54°	White	LED Disk 800Lm
12.02.002021	Recessed	The Delphinus one square 54°	Black	LED Disk 800Lm
12.02.002022	Recessed	The Delphinus one square 54°	Grey	LED Disk 800Lm

The Delphinus two & three square



The Delphinus two square



The Delphinus three square



Philips Fortimo LED Disk

Technical information



Downlighter recessed, produced in die-cast aluminium. Bracket has a 25° adjustable angle. Supplied including electronic driver with Philips Fortimo LED Disk module and an integrated driver.

Details

Standard 2700K, beam angle 54°, dimmable.


Optional: 4000K and 5000K, beam angle 25°.

Hole size

The Delphinus two square L225mm x W122mm

The Delphinus three square L330mm x W122mm

Size

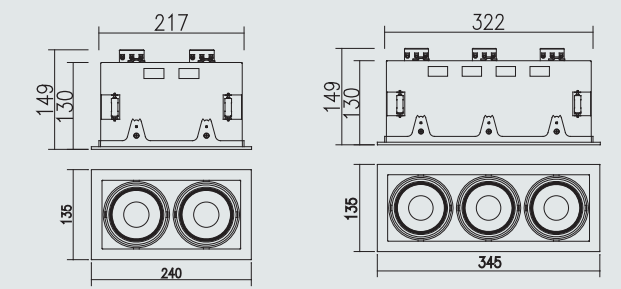

The Delphinus two square

The Delphinus three square

Assortment overview

Article number	Model	Type	Colour	Lumen
12.02.002030	Recessed	The Delphinus two square 54°	White	LED Disk 800Lm
12.02.002031	Recessed	The Delphinus two square 54°	Black	LED Disk 800Lm
12.02.002032	Recessed	The Delphinus two square 54°	Grey	LED Disk 800Lm
12.02.002040	Recessed	The Delphinus three square 54°	White	LED Disk 800Lm
12.02.002041	Recessed	The Delphinus three square 54°	Black	LED Disk 800Lm
12.02.002042	Recessed	The Delphinus three square 54°	Grey	LED Disk 800Lm

The Zenith & The Zodiac



The Zenith



The Zodiac



Philips Fortimo LED DLM

Assortment overview

Article number	Model	Type	Colour	Lumen
12.01.005690	Recessed	The Zenith 42°	White	Fortimo LED DLM 1100Lm
12.01.005691	Recessed	The Zenith 42°	Black	Fortimo LED DLM 1100Lm
12.01.005692	Recessed	The Zenith 42°	Grey	Fortimo LED DLM 1100Lm
12.01.005710	Recessed	The Zodiac 30°	White	Fortimo LED DLM 1100Lm
12.01.005711	Recessed	The Zodiac 30°	Black	Fortimo LED DLM 1100Lm
12.01.005712	Recessed	The Zodiac 30°	Grey	Fortimo LED DLM 1100Lm
12.01.005680	Recessed	The Zenith 42°	White	Fortimo LED DLM 2000Lm
12.01.005681	Recessed	The Zenith 42°	Black	Fortimo LED DLM 2000Lm
12.01.005682	Recessed	The Zenith 42°	Grey	Fortimo LED DLM 2000Lm
12.01.005700	Recessed	The Zodiac 30°	White	Fortimo LED DLM 2000Lm
12.01.005701	Recessed	The Zodiac 30°	Black	Fortimo LED DLM 2000Lm
12.01.005702	Recessed	The Zodiac 30°	Grey	Fortimo LED DLM 2000Lm

Technical information



Downlighter recessed, produced in die-cast aluminium. Supplied including electronic driver with Philips Fortimo LED DLM system.

Details

Standard 3000K.

The Zenith: beam angle 42°. The Zodiac: beam angle 30°.

Optional: 4000K, Osram and emergency.


The Zenith: beam angle 67°. The Zodiac: beam angle 60°.

Hole size

The Zenith Ø155mm

The Zodiac Ø180mm

Size

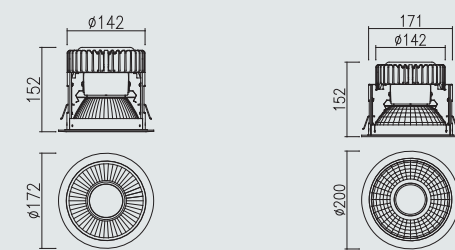

The Zenith

The Zodiac

The Milano small & medium

Technical information



Downlighter recessed, produced in die-cast aluminium with polycarbonate cover. Supplied including electronic driver.

Details

Standard 3000K, beam angle 50°.


Optional: 4000K and 5000K, moistureproof.

Hole size

The Milano small Ø91mm

The Milano medium Ø111mm

Size

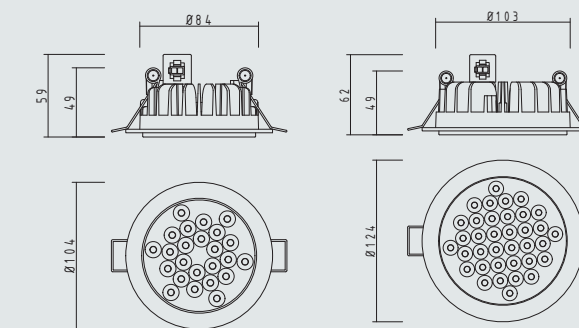

The Milano small

The Milano medium



The Milano small



The Milano medium

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000680	Recessed	The Milano small 50°	White	LED 270Lm
11.00.000681	Recessed	The Milano small 50°	Black	LED 270Lm
11.00.000682	Recessed	The Milano small 50°	Grey	LED 270Lm
11.00.000690	Recessed	The Milano medium 50°	White	LED 399Lm
11.00.000691	Recessed	The Milano medium 50°	Black	LED 399Lm
11.00.000692	Recessed	The Milano medium 50°	Grey	LED 399Lm

The Milano large & extra large



The Milano large



The Milano extra large

Technical information



Downlighter recessed, produced in die-cast aluminium with polycarbonate cover. Supplied including electronic driver.

Details

The Milano large: standard 3000K, beam angle 50°.

The Milano extra large: standard 3000K, beam angle 65°.


Optional: 4000K and 5000K, moistureproof.

Hole size

The Milano large Ø158mm

The Milano extra large Ø275mm

Size

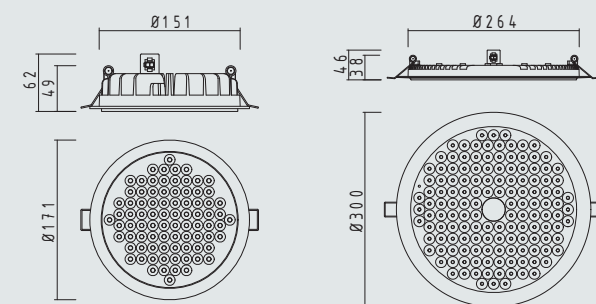

The Milano large

The Milano extra large

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000700	Recessed	The Milano large 50°	White	LED 958Lm
11.00.000701	Recessed	The Milano large 50°	Black	LED 958Lm
11.00.000702	Recessed	The Milano large 50°	Grey	LED 958Lm
11.00.000710	Recessed	The Milano extra large 65°	White	LED 2064Lm
11.00.000711	Recessed	The Milano extra large 65°	Black	LED 2064Lm
11.00.000712	Recessed	The Milano extra large 65°	Grey	LED 2064Lm

The Como small & medium



The Como small



The Como medium

Technical information



Downlighter recessed, produced in die-cast aluminium with polycarbonate cover. Supplied including electronic driver.

Details

Standard 3000K, beam angle 60°.


Optional: 4000K and 5000K, moistureproof.

Hole size

The Como small L89mm x W89mm

The Como medium L101mm x W101mm

Size

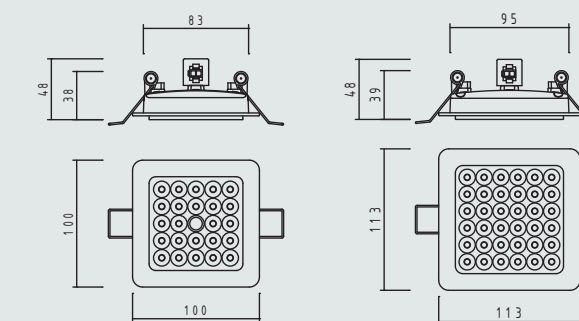

The Como small

The Como medium

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000720	Recessed	The Como small 60°	White	LED 311Lm
11.00.000721	Recessed	The Como small 60°	Black	LED 311Lm
11.00.000722	Recessed	The Como small 60°	Grey	LED 311Lm
11.00.000730	Recessed	The Como medium 60°	White	LED 469Lm
11.00.000731	Recessed	The Como medium 60°	Black	LED 469Lm
11.00.000732	Recessed	The Como medium 60°	Grey	LED 469Lm

The Como large & extra large



The Como large



The Como extra large

Technical information



Downlighter recessed, produced in die-cast aluminium with polycarbonate cover. Supplied including electronic driver.

Details

The Como large: standard 3000K, beam angle 55°.


The Como extra large: standard 3000K, beam angle 61°.

Hole size

The Como large L113mm x W113mm

The Como extra large L233mm x W233mm

Size

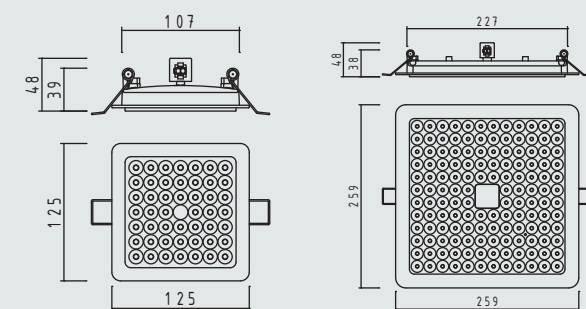

The Como large

The Como extra large

Assortment overview

Article number	Model	Type	Colour	Lumen
11.00.000740	Recessed	The Como large 55°	White	LED 654Lm
11.00.000741	Recessed	The Como large 55°	Black	LED 654Lm
11.00.000742	Recessed	The Como large 55°	Grey	LED 654Lm
11.00.000750	Recessed	The Como extra large 61°	White	LED 2094Lm
11.00.000751	Recessed	The Como extra large 61°	Black	LED 2094Lm
11.00.000752	Recessed	The Como extra large 61°	Grey	LED 2094Lm

LIVAL Lean LED DL



LIVAL Lean LED DL

Technical information



Downlighter recessed, produced in die-cast aluminium with safety glass, passively cooled. Adjustable and rotational model. Supplied including electronic driver.

Details


Standard 3000K.

Optional: 4000K and 5600K, dali dimmable, various effect filters available on request: bakery (gold), fish (blue), fruit (yellow), vegetable (green) and meat (pink).

Hole size

Ø180mm

Size

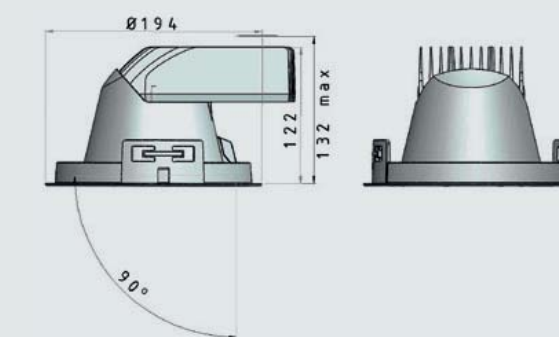

Assortment overview

Article number	Model	Type	Colour	Lumen
19K11115	Recessed	Lival Lean LED DL spot	Grey	LED 3120Lm
19K11116	Recessed	Lival Lean LED DL spot	White	LED 3120Lm
19K11119	Recessed	Lival Lean LED DL spot	Black	LED 3120Lm
19K11125	Recessed	Lival Lean LED DL flood	Grey	LED 3120Lm
19K11126	Recessed	Lival Lean LED DL flood	White	LED 3120Lm
19K11129	Recessed	Lival Lean LED DL flood	Black	LED 3120Lm
19K11135	Recessed	Lival Lean LED DL wide flood	Grey	LED 3120Lm
19K11136	Recessed	Lival Lean LED DL wide flood	White	LED 3120Lm
19K11139	Recessed	Lival Lean LED DL wide flood	Black	LED 3120Lm

LIVAL Lean LED DL Mini



LIVAL Lean LED DL Mini

Technical information



Downlighter recessed, produced in die-cast aluminium with safety glass, passively cooled. Adjustable and rotational model. Supplied including electronic driver.


Details

Standard 3000K.

Optional: 4000K.

Hole size

Ø150mm

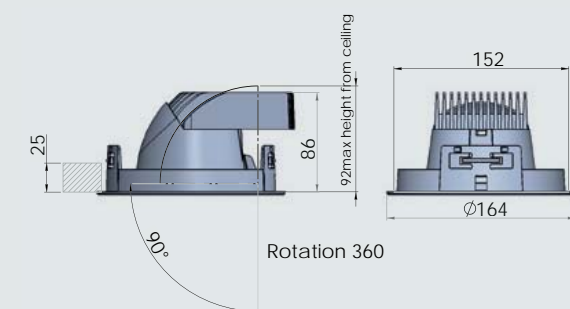Size

Assortment overview

Article number	Model	Type	Colour	Lumen
19M11115	Recessed	Lival Lean LED DL Mini spot	Grey	LED 2050Lm
19M11116	Recessed	Lival Lean LED DL Mini spot	White	LED 2050Lm
19M11119	Recessed	Lival Lean LED DL Mini spot	Black	LED 2050Lm
19M11125	Recessed	Lival Lean LED DL Mini flood	Grey	LED 2050Lm
19M11126	Recessed	Lival Lean LED DL Mini flood	White	LED 2050Lm
19M11129	Recessed	Lival Lean LED DL Mini flood	Black	LED 2050Lm
19M11135	Recessed	Lival Lean LED DL Mini wide flood	Grey	LED 2050Lm
19M11136	Recessed	Lival Lean LED DL Mini wide flood	White	LED 2050Lm
19M11139	Recessed	Lival Lean LED DL Mini wide flood	Black	LED 2050Lm

LIVAL First LED DL



LIVAL First LED DL

Technical information



Downlighter recessed, produced in die-cast aluminium with safety glass. Adjustable and rotational model, passively cooled. Supplied including electronic driver.


Details

Standard 3000K.

Optional: 4000K and 5600K, dali dimmable, double or triple version. Various effect filters available on request: bakery (gold), fish (blue), fruit (yellow), vegetable (green) and meat (pink).

Hole size

180mm x 180mm

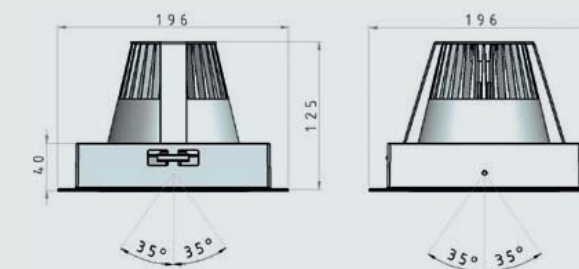Size

Assortment overview

Article number	Model	Type	Colour	Lumen
10A11115	Recessed	Lival First LED DL spot	Grey	LED 3120Lm
10A11116	Recessed	Lival First LED DL spot	White	LED 3120Lm
10A11119	Recessed	Lival First LED DL spot	Black	LED 3120Lm
10A11125	Recessed	Lival First LED DL flood	Grey	LED 3120Lm
10A11126	Recessed	Lival First LED DL flood	White	LED 3120Lm
10A11129	Recessed	Lival First LED DL flood	Black	LED 3120Lm
10A11135	Recessed	Lival First LED DL wide flood	Grey	LED 3120Lm
10A11136	Recessed	Lival First LED DL wide flood	White	LED 3120Lm
10A11139	Recessed	Lival First LED DL wide flood	Black	LED 3120Lm

LIVAL VIP LED DL



LIVAL VIP LED DL

Technical information



Downlighter recessed, produced in die-cast aluminium with safety glass. Adjustable and rotational model, actively cooled. Supplied including electronic driver.


Details

Standard 3000K.

Optional: 4000K and 5600K, dali dimmable, various effect filters available on request: bakery (gold), fish (blue), fruit (yellow), vegetable (green) and meat (pink).

Hole size

Ø180mm

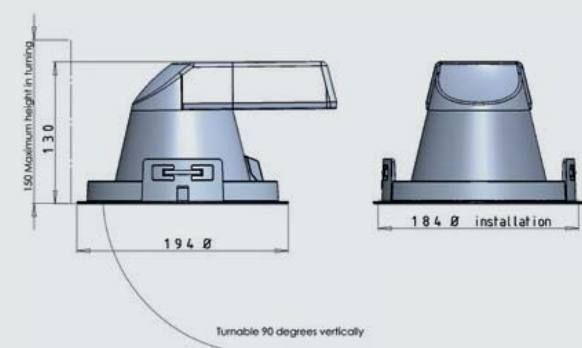Size**Assortment overview**

Article number	Model	Type	Colour	Lumen
19H11115	Recessed	Lival VIP LED DL spot	Grey	LED 3120Lm
19H21116	Recessed	Lival VIP LED DL spot	White	LED 3120Lm
19H11119	Recessed	Lival VIP LED DL spot	Black	LED 3120Lm
19H11125	Recessed	Lival VIP LED DL flood	Grey	LED 3120Lm
19H21126	Recessed	Lival VIP LED DL flood	White	LED 3120Lm
19H11129	Recessed	Lival VIP LED DL flood	Black	LED 3120Lm
19H11135	Recessed	Lival VIP LED DL wide flood	Grey	LED 3120Lm
19H11136	Recessed	Lival VIP LED DL wide flood	White	LED 3120Lm
19H11139	Recessed	Lival VIP LED DL wide flood	Black	LED 3120Lm

LIVAL LEDge



LIVAL LEDge

Technical information



Downlighter recessed, produced in die-cast aluminium with safety glass. Fixed model, actively cooled. Supplied including electronic driver.


Details

Standard 3000K.

Optional: 4000K or 5600K, dali dimmable, double and triple versions available. Various effect filters available on request: bakery (gold), fish (blue), fruit (yellow), vegetable (green) and meat (pink).

Hole size

Ø180mm

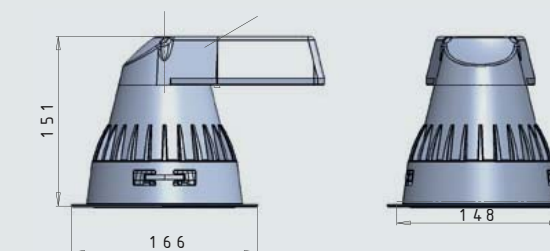Size**Assortment overview**

Article number	Model	Type	Colour	Lumen
19G11115	Recessed	Lival LEDge spot	Grey	LED 3120Lm
19G21116	Recessed	Lival LEDge spot	White	LED 3120Lm
19G11119	Recessed	Lival LEDge spot	Black	LED 3120Lm
19G11125	Recessed	Lival LEDge flood	Grey	LED 3120Lm
19G21126	Recessed	Lival LEDge flood	White	LED 3120Lm
19G11129	Recessed	Lival LEDge flood	Black	LED 3120Lm
19G11135	Recessed	Lival LEDge wide flood	Grey	LED 3120Lm
19G11136	Recessed	Lival LEDge wide flood	White	LED 3120Lm
19G11139	Recessed	Lival LEDge wide flood	Black	LED 3120Lm

LIVAL Smart & Smart+



LIVAL Smart



LIVAL Smart +



Technical information



Downlighter recessed, produced in die-cast aluminium. Provided with citizen chips. No heat or UV radiation. Integrated thermal protection. Supplied including electronic driver.

Details


Standard 3000K.

Optional: 4000K.

Hole size

LIVAL Smart Ø160mm

LIVAL Smart+ Ø170mm

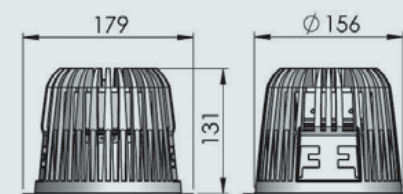Size

Assortment overview

Article number	Model	Type	Colour	Lumen
19C24115	Recessed	Lival Smart flood	Grey	LED 2000Lm
19C24116	Recessed	Lival Smart flood	White	LED 2000Lm
19C24119	Recessed	Lival Smart flood	Black	LED 2000Lm
19C24135	Recessed	Lival Smart wide flood	Grey	LED 2000Lm
19C24136	Recessed	Lival Smart wide flood	White	LED 2000Lm
19C24139	Recessed	Lival Smart wide flood	Black	LED 2000Lm
19C14115	Recessed	Lival Smart+ very wide flood	Grey	LED 2000Lm
19C14116	Recessed	Lival Smart+ very wide flood	White	LED 2000Lm
19C14119	Recessed	Lival Smart+ very wide flood	Black	LED 2000Lm

LIVAL Hony LED



LIVAL Hony LED



Technical information



Downlighter recessed, produced in die-cast aluminium. Provided with citizen chips. Large energy saving possibilities and improved smoother light. Supplied including electronic driver.

Details

Details to come.

Size